

## MULTIPOINT LIGHTNING ARRESTER GUARDS (LA -13002)

The guard that is typically included with new arresters often doesn't provide enough coverage to fully protect the wire connections or properly overlap the stripped section of a poly-covered conductor at the connection point. Lightning arrester protection should consider the higher the voltage the further the coverage needs to extend – Reliaguard Multipoint Lightning Arrester Guards meet this requirement. Reliaguard Pipe Bus Guards protect endangered species, birds, squirrels, raccoons, snakes, feral cats and other wildlife from contact with energized risk points.

### Better by Design

- Based on the 100 years of collective knowledge from the Reliaguard linemen who specialize in wildlife mitigation, designs consider all risk points. A team of CAD designers support our linemen to incorporate features unique to only Reliaguard Bushing Guards.
- Lightning arrester guards are designed to deliver better coverage of the wire connection and properly overlap conductors at the connection point

### Superior Material

- With current surges being diverted through arresters, it is critically important that the arresters and associated guards are non-flammable
- All Reliaguard products are made from Reliatanium, a proprietary material designed by Reliaguard's chemical engineering founders.
- Reliatanium achieves a V-0 flammability classification, the highest rating for the UL 94 test standard and has a 15+ year lifespan.
- Reliatanium material properties incorporate UV stability and flame retardancy
- Rigid and robust material in properties and design
- Tested to meet specific guidelines of IEEE 1656-2010



### Ease of Installation


Power linemen like our products because:

- Reliaguard<sup>®</sup> Lightning Arrester Guards are designed to stay in place. Retention of the cover once applied is a critical design feature to be considered.
- Guards have 3 ports and can accommodate conductors exiting at various angles
- Fits a wide range of lightning arresters
- Best results are achieved when installed with GreyEEL Conductor Cover



## Technical Features

Designed to prevent wildlife caused outages, these guards are tested for application on equipment up to 38kV.

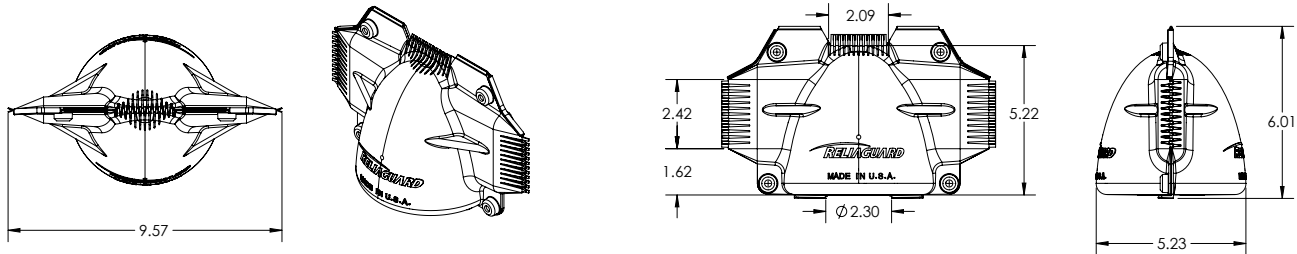

Product Name	Part Number	Height Dimension *	Diameter Dimension *	Additional Dimension*	Pack Size (MOQ)
Lightning Arrester - Multi Port	LA-13002	4.75 (120.6)	5 (127)	2.3 (58.4) base port	12

\*Dimensions in inches (millimeters)

## RELIATANIUM MATERIAL PERFORMANCE TESTING All tests conducted at 38KV.

Performance Test #	Test Standards	Details	Test Result
Flammability	UL - 94	Vertical Flame Test Test plaques self-extinguishing with no drips	V-0
Ultraviolet Aging	IEEE std 1656™ - 2010 Section 5.6	After completing 1000 hours, no perceived changes to the condition of test samples.	Completed
Tracking and Erosion Resistance	IEC 60587	6 hrs (Full duration of test)	Achieved @ 2KV
Wet Power Frequency Flashover	IEEE Std 1656™-2010 Section 5.3	Average flashover value of all samples greater than 90% of the value obtained on the test fixture alone	Passed
Wet Withstand	IEEE Std 1656™-2010 Section 5.2.1	Option 1 - moving Electrode All Samples did not puncture or flash over	Passed
Tensile Strength at Break	ASTM D638		2,000 psi
Shore Durometer	ASTM D2240		65 Shore D
Heat Deflection	ASTM D648		225°F 66 psi